


## OVERVIEW

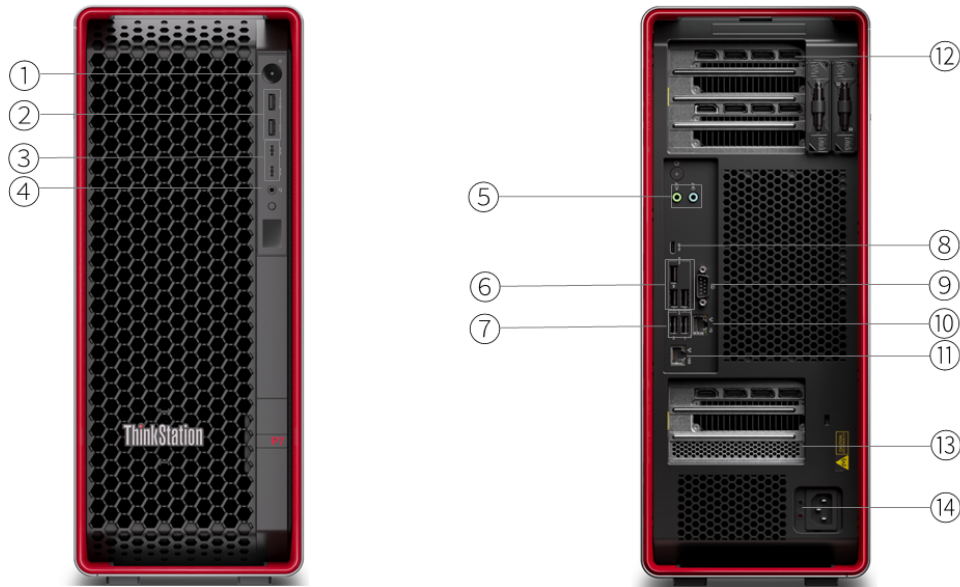

1. Power button	8. USB-C 3.2 Gen 2x2
2. 2x USB 3.2 Gen 2 (one Always On) *	9. Serial (9-pin) *
3. 2x USB-C 3.2 Gen 2 *	10. Ethernet (GbE RJ-45)
4. Headphone (3.5mm)	11. Ethernet (10GbE RJ-45)
5. 2x Audio ports (line-out and line-in)	12. Upper PCIe slots
6. 3x USB 3.2 Gen 2	13. Lower PCIe slots
7. 2x USB 2.0	14. Power supply

Notes:

- Items with \* are only available on selected models
- Expansion cards are optional. More ports are available through the optional expansion cards

## PERFORMANCE

### Processor

#### Processor Family

Up to one Intel® Xeon® W-3400 Series processor, supports up to 56 cores, up to 4.8GHz

#### Processor\*\*<sup>[1]</sup>

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support
Xeon w5-3423	12	24	2.1GHz	4.2GHz	30MB	DDR5-4400
Xeon w5-3425	12	24	3.2GHz	4.6GHz	30MB	DDR5-4800
Xeon w5-3433	16	32	2.0GHz	4.2GHz	45MB	DDR5-4400
Xeon w5-3435X	16	32	3.1GHz	4.7GHz	45MB	DDR5-4800
Xeon w7-3445	20	40	2.6GHz	4.8GHz	52.5MB	DDR5-4800
Xeon w7-3455	24	48	2.5GHz	4.8GHz	67.5MB	DDR5-4800
Xeon w7-3465X	28	56	2.5GHz	4.8GHz	75MB	DDR5-4800
Xeon w9-3475X	36	72	2.2GHz	4.8GHz	82.5MB	DDR5-4800
Xeon w9-3495X	56	112	1.9GHz	4.8GHz	105MB	DDR5-4800

#### Processor Sockets

1x FCLGA4677

Notes:

<sup>[1]</sup> Intel Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see <http://www.intel.com/technology/turboboost/> for more information.

### Operating System

#### Operating System\*\*

- Red Hat Enterprise Linux 9.2 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- Windows® 11 DG Windows 10 Pro 64 for Workstations
- Windows 11 Pro for Workstations
- No operating system

### Graphics

#### Discrete Graphics Support<sup>[1]</sup>

Supports up to three NVIDIA® RTX A5500

#### Discrete Graphics Offering

Graphics	Memory	Power	Connector	Form Factor	SLI / NVLink
NVIDIA T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	Single slot	None
NVIDIA RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	Dual slot	NVLink
NVIDIA RTX A5500	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	NVLink

Notes:

<sup>[1]</sup> Discrete graphics support may vary by configurations such as processor selection or power supply wattage.

### Monitor Support

#### Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

## Chipset

### Chipset

Intel W790 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 1TB (8x 128GB 3DS-RDIMM)

### Memory Type<sup>\*\*[2]</sup>

- DDR5-4800 3DS-RDIMM ECC
- DDR5-4800 RDIMM ECC

### Memory Slots

8 DDR5 DIMM slots, 8 channels capable

### Memory Protection

ECC

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] ThinkStation® P7 comes with DDR5-4800 memory, and some configurations will run at DDR5-4400 due to the memory support capability of processor.

## Storage

### Storage Support<sup>[1][2]</sup>

Up to eleven drives (3x 3.5" SATA HDD + 8x M.2 SSD) or 9 drives (9x M.2 SSD)

- 3.5" HDD up to 12TB each
- M.2 SSD up to 4TB or 2TB each (see Storage Type)

### Storage Type

Disk Type	Interface	RPM	Offering	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	2TB / 6TB / 12TB	-
M.2 2280 SSD for quad M.2 to PCIe® adapter	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0
M.2 2280 SSD for Onboard / HDD Bay / Front access M.2	PCIe NVMe, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0

### Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Onboard Intel RSTe SATA RAID	Standard	SATA 6.0Gb/s	0/1/5	None
Integrated NVMe controller	Standard	PCIe NVMe	-	None
NVMe Basic	Optional	PCIe NVMe	0/1/10	None
NVMe Premium	Optional	PCIe NVMe	0/1/10/5	None

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo storage offerings.

[2] For certain post-manufacturing storage upgrades, additional upgrade kits may be required.

## Removable Storage

### Card Reader

- 15-in-1 card reader
- No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC897-Q codec

### Speakers

Single speaker, 1.5W x1

## Power Supply

### Power Supply\*\*

Power	Type	Efficiency	Key Features
1000W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
1400W <sup>[1]</sup>	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

Notes:

[1] Countries with input voltage is 100 - 111.9V, output power is limited to 1125W; input voltage is 120V, output power is limited to 1250W.

## DESIGN

### Mechanical

#### Form Factor

Tower (39L) or 4U rack, optional rack rail kit needed

#### Dimensions (WxDxH)<sup>[1]</sup>

175 x 508 x 434.4 mm (6.9 x 20 x 17.1 inches, with feet)

#### Weight<sup>[2]</sup>

24.5 kg (50.0 lbs, maximum configuration)

#### Bays<sup>[3]</sup>

Three internal disk bays plus one front access M.2 bay:

- Bay 1 supports one 3.5" HDD, standard, optional support for M.2 SSD
- Bay 2 supports one 3.5" HDD, standard, optional support for M.2 SSD
- Bay 3 supports one 3.5" HDD, optional
- Front access M.2 bay supports one M.2 SSD, optional

#### M.2 Slots

Up to 9x M.2 SSD:

- 3 via onboard slots, 3rd M.2 slot is vertical and optional holder is needed
- 4 via Quad M.2 to PCIe adapter
- 2 via HDD bay or 1 via front access M.2 bay (choose one)

#### Expansion Slots

Supports 7 PCIe slots with 4x PCIe 5.0 slots and 3x PCIe 4.0 slots.

- Slot 1: PCIe 5.0 x16, full height, full length, 75W, double-width
- Slot 2: PCIe 4.0 x8, full height, full length, 25W
- Slot 3: PCIe 5.0 x16, full height, full length, 75W, double-width
- Slot 4: PCIe 4.0 x4, full height, full length, 25W
- Slot 5: PCIe 5.0 x16, full height, full length, 75W, double-width
- Slot 6: PCIe 4.0 x16, full height, full length, 75W
- Slot 7: PCIe 5.0 x4, full height, full length, 25W

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] Only one of the following can be selected per system:

- 2x 3.5" disk bay for M.2 SSD
- 1x front access M.2 bay for M.2 SSD.

## CONNECTIVITY

### Network

#### Onboard Ethernet

Two Ethernet, GbE + 10GbE, Intel Ethernet Connection I219-LM and Marvell AQtion AQC-113C, 2x RJ-45, supports Wake-on-LAN

#### Optional Ethernet

Two additional Ethernet adapters support, up to eight additional GbE ports

- Gigabit Ethernet, Intel I210-T1, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Realtek RTL8168H, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4
- Gigabit Ethernet, Intel I350-T4, 4x RJ-45, PCIe x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe x1

#### WLAN + Bluetooth®

- Intel Wi-Fi® 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1 (Bluetooth 5.3 hardware ready), Intel vPro® technology support<sup>[1]</sup>
- No WLAN and Bluetooth

Notes:

[1] Bluetooth 5.3 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi 6E is only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.

## Ports<sup>[1]</sup>

### Front Ports

1x headphone / microphone combo jack (3.5mm)

### Optional Front Ports

- 2x USB-C® 3.2 Gen 2 (support data transfer)
- 2x USB 3.2 Gen 2 (one Always On)

### Rear Ports<sup>[2]</sup>

- 1x USB-C 3.2 Gen 2x2 (support data transfer)
- 2x USB 2.0
- 3x USB 3.2 Gen 2
- 1x Ethernet (10GbE RJ-45)
- 1x Ethernet (GbE RJ-45)
- 1x line-in (3.5mm)
- 1x line-out (3.5mm)

### Optional Rear Ports

- 1x serial
- 2x PS/2

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

#### Physical Locks

- (Optional) Access panel lock kit with common key
- (Optional) Access panel lock kit with unique key
- Kensington® Security Slot™, 3 x 7 mm

## Chassis Intrusion Switch

Chassis intrusion switch

## BIOS Security

- Administrator password
- Power-on password
- UEFI Secure Boot
- Self-healing BIOS

# MANAGEABILITY

## System Management

### System Management<sup>[1]</sup>

Intel vPro Enterprise with Intel AMT 16

Notes:

[1] Intel vPro offers a superset of DASH's defined capabilities.

## Diagnostic

### Diagnostic

- ThinkStation Diagnostics
- Front diagnostic panel with QR code

# SERVICE

## Warranty<sup>[1]</sup>

### Base Warranty\*\*

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

# ENVIRONMENTAL

## Operating Environment

### Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

# CERTIFICATIONS

## Green Certifications<sup>[1]</sup>

### Green Certifications

- (Optional) ENERGY STAR® 8.0

- (Optional) EPEAT™ Gold Registered
- RoHS compliant
- TCO Certified 9.0

---

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

## ISV Certifications

### ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

